



The V6 Series is a family of regulated, fixed output polarity modular high voltage power supplies which provide exceptional performance and value in many applications.

The V6 Series units are fully enclosed and designed for system or bench top operation. A wide range of output voltages, up to 30kV is available.

The output voltage is controlled locally by an internal multi-turn potentiometer. Remote analog voltage or resistance programming capability is included in all models. Analog monitor outputs are also included for remote monitoring of both the high voltage and current outputs.

TYPICAL APPLICATIONS

Spectrometers
CRT Testing
Detectors
E Beam Systems
General Laboratory Usage

OPTIONS

RS RS-232 Interface (analog control not included)

SPECIFICATIONS

Input Voltage:

AC Model: 100-240Vac, $\pm 10\%$; 50/60 Hertz; 1 amp
DC Model: 24Vdc $\pm 10\%$, 2 amps

Voltage Regulation:

Line: $\pm 0.005\%$ of maximum 90-240Vac input line change
 $\pm 0.005\%$ of maximum $\pm 10\%$ Vdc input line change

Load: $\pm 0.01\%$ of maximum for 0 to maximum rated output current change

Current Regulation:

Line: $\pm 0.05\%$ of maximum current for 90-240Vac input line change
0.05% of maximum current for $\pm 10\%$ Vdc input change

Load: 0.2% of maximum current for 0 to maximum rated output voltage change

Ripple:

See "model selection" table

- **Compact Models up to 30kV**
- **High Stability**
- **Low Ripple and Noise**
- **Analog Control (Remote/Local)**
- **RS-232 Control (Digital Only)**
- **Voltage and Current Monitoring**
- **Arc and Short Circuit Protected**
- **OEM Customization Available**

www.spellmanhv.com/manuals/V6

Temperature Coefficient:

$\leq 50\text{ppm}/^\circ\text{C}$

Stability:

$\leq 0.01\%/hour$, 0.02% per 8 hours after a 1/2 hour warm up

Operating Temperature:

0°C to +50°C

Storage Temperature:

-40°C to +85°C

Humidity:

20% to 85%RH, non-condensing

Local Control:

Internal multi-turn potentiometer for 0 to maximum output voltage ($\pm 0.2\%$)

Remote Programming:

0 to +5Vdc analog input signal proportional to 0 to maximum rated output. Accuracy is $\pm(0.1\%$ of setting +0.1% of maximum). The programming input impedance is 20 megohms.

Voltage Monitor:

0 to +5V proportional to 0 to maximum output voltage. Accuracy is $\pm(0.1\%$ of reading +0.1% of maximum). The monitor impedance is 10 kilohms.

Current Monitor:

0 to +5V proportional to 0 to maximum output current. Accuracy is $\pm(2.0\%$ of reading +1.0% of maximum). The monitor impedance is 10 kilohms.

Enable:

Remote interlock enables (low) disables internally (high) the high voltage output. Signal is normally high and supply will default to a disabled condition.

Current Limit:

All units provide short circuit current limiting to less than 110% of the maximum rated output current. Supply is self restoring upon removal of cause limit condition.

Arc/Short Circuit:

Short circuit and arc protected; self restoring.

Cooling:

Convection cooled

Output Connector:

Models up to and including 5kV use a Spellman P/N JAC high voltage connector. The required mating connector is a Spellman P/N 105808-384, which is provided. The 10kV through 30kV units use a Spellman P/N JGP high voltage connector (Alden 8101). All 10 through 30kV units are provided with mating connectors assembled to 2.0 meters of high voltage cable.

Dimensions:

AC Model: 3.05" W X 5.1" H X 7.06" D
(77mm X 132mm X 179mm)

DC Model: 2.32" W X 5.1" H X 7.06" D
(59mm X 132mm X 179mm)

Weight:

AC Model: 4.5 pounds (2.0kg)

DC Model: 3.75 pounds (1.7kg)

Regulatory Approvals:

Compliant to EEC EMC Directive. Compliant to EEC Low Voltage Directive. UL/CUL recognized, File E227588. RoHS Compliant.

V6A MODEL SELECTION TABLE

V6 AC Series	Voltage	Current	Ripple
V6A1*30	0 to 1kV	0 to 30mA	75mV
V6A1.5*30	0 to 1.5kV	0 to 20mA	75mV
V6A3*30	0 to 3kV	0 to 10mA	120mV
V6A5*30	0 to 5kV	0 to 6mA	150mV
V6A10*30	0 to 10kV	0 to 3mA	400mV
V6A15*30	0 to 15kV	0 to 2mA	900mV
V6A20*30	0 to 20kV	0 to 1.5mA	1.0V
V6A30*30	0 to 30kV	0 to 1mA	1.8V

*Specify "P" for positive polarity or "N" for negative polarity

V6D MODEL SELECTION TABLE

V6 DC Series	Voltage	Current	Ripple
V6D1*30	0 to 1kV	0 to 30mA	75mV
V6D1.5*30	0 to 1.5kV	0 to 20mA	75mV
V6D3*30	0 to 3kV	0 to 10mA	120mV
V6D5*30	0 to 5kV	0 to 6mA	150mV
V6D10*30	0 to 10kV	0 to 3mA	400mV
V6D15*30	0 to 15kV	0 to 2mA	900mV
V6D20*30	0 to 20kV	0 to 1.5mA	1.0V
V6D30*30	0 to 30kV	0 to 1mA	1.8V

*Specify "P" for positive polarity or "N" for negative polarity


V6A ANALOG/DIGITAL INTERFACE— J1 15 PIN FEMALE D CONNECTOR

PIN	SIGNAL	SIGNAL PARAMETERS
1	Local Voltage Program	Multi-turn front panel potentiometer
2	TX Out (optional)	RS232 Receive Data
3	RX In (optional)	RS232 Transmit Data
4	Voltage Program Input	0 to 5V=0 to 100% Rated Output, Zin=20MΩ
5	Signal Ground	RS232 Ground (optional)
6	Signal Ground	Ground
7	+5V Reference Out	+5V @ 1mA Max.
8	HV Enable Input	Active Low to Enable the HV
9	Current Program Input	0 to 5V=0 to 100% Rated Output, Zin=20MΩ
10	Current Monitor	0 to 5V=0 to 100% Rated Output, Zout=10kΩ
11	Voltage Monitor	0 to 5V=0 to 100% Rated Output, Zout=10kΩ
12	HV Enable Output	Active Low HV is Enabled
13	Signal Ground	Ground
14	N/C	No Connection
15	N/C	No Connection

V6D ANALOG/DIGITAL INTERFACE— J1 15 PIN FEMALE D CONNECTOR

PIN	SIGNAL	SIGNAL PARAMETERS
1	Local Voltage Program	Multi-turn front panel potentiometer
2	TX Out (optional)	RS232 Receive Data
3	RX In (optional)	RS232 Transmit Data
4	Voltage Program Input	0 to 5V=0 to 100% Rated Output, Zin=20MΩ
5	Signal Ground	RS232 Ground (optional)
6	Signal Ground	Ground
7	+5V Reference Out	+5V @ 1mA Max.
8	HV Enable Input	Active Low to Enable the HV
9	Current Program Input	0 to 5V=0 to 100% Rated Output, Zin=20MΩ
10	Current Monitor	0 to 5V=0 to 100% Rated Output, Zout=10kΩ
11	Voltage Monitor	0 to 5V=0 to 100% Rated Output, Zout=10kΩ
12	HV Enable Output	Active Low HV is Enabled
13	+24V Return	Input Voltage Return
14	+24Vdc Input	Input Voltage 24V±10%, 2A
15	+24Vdc Input	Input Voltage 24V±10%, 2A


ORDERING EXAMPLE

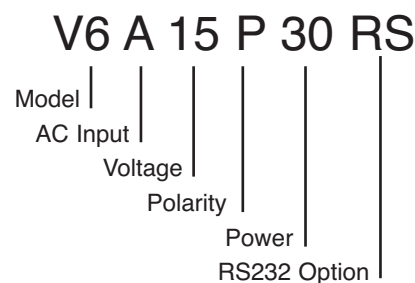


DIMENSIONS: in.[mm]

V6-AC


TOP VIEW

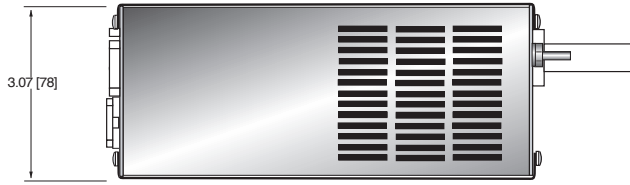

SIDE VIEW

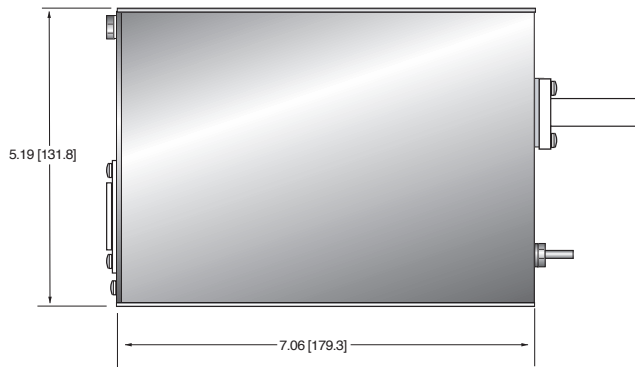

BOTTOM VIEW

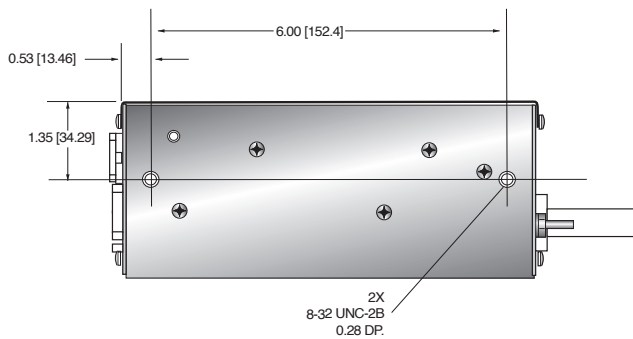

FRONT VIEW



BACK VIEW




V6-DC


TOP VIEW



SIDE VIEW

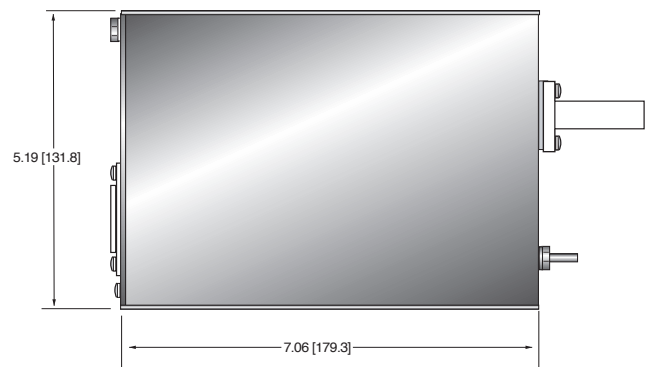

BOTTOM VIEW

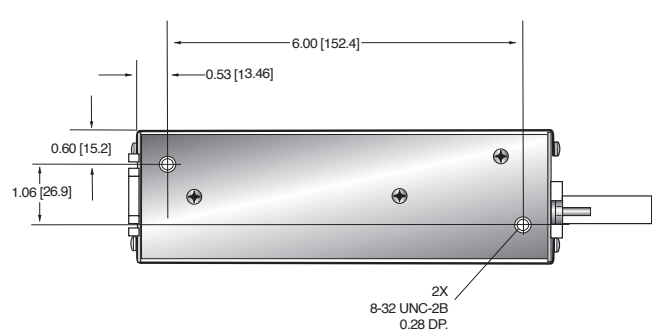

FRONT VIEW



BACK VIEW

